


REVISIONS

REV.	DESCRIPTION	DATE DONE	DONE BY	CHECKED BY
0	INITIAL RELEASE;REFER MECH-150-02-RO REV1;	25.FEB.19	DANIEL	GUS

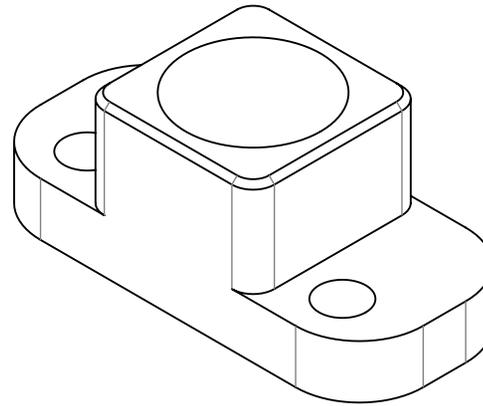


NOTES:

1. MATERIAL IS 6061-T6 ALUMINUM
2. LIGHT BEAD BLAST, THEN ANODIZE MIL-A-8625F, TYPE 2, CLASS 2, BLACK, 0.7-1.0 MILS
3. MUST BE COMPLIANT WITH THE CURRENT ROHS DIRECTIVE 2002/95/EC (INCLUDING DECA-BDE)



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS
 THE SOLE PROPERTY OF FLIR INTEGRATED IMAGING
 SOLUTIONS. ANY REPRODUCTION IN PART OR
 WHOLE WITHOUT THE WRITTEN PERMISSION OF FLIR
 INTEGRATED IMAGING SOLUTIONS IS PROHIBITED.




TOLERANCES
 X.X ±0.3
 X.XX ±0.10
 X.XXX ±0.020
 ANGLES ±0.5°


UNLESS OTHERWISE
 STATED:
 ALL DIMENSIONS IN MM
 MACHINE FINISH 1.6µM

SCALE	DWG NO
2:1	12-00112-00000
SIZE	TITLE
A	FFY TRIPOD ADAPTER

SHEET	REV
1 OF 2	0

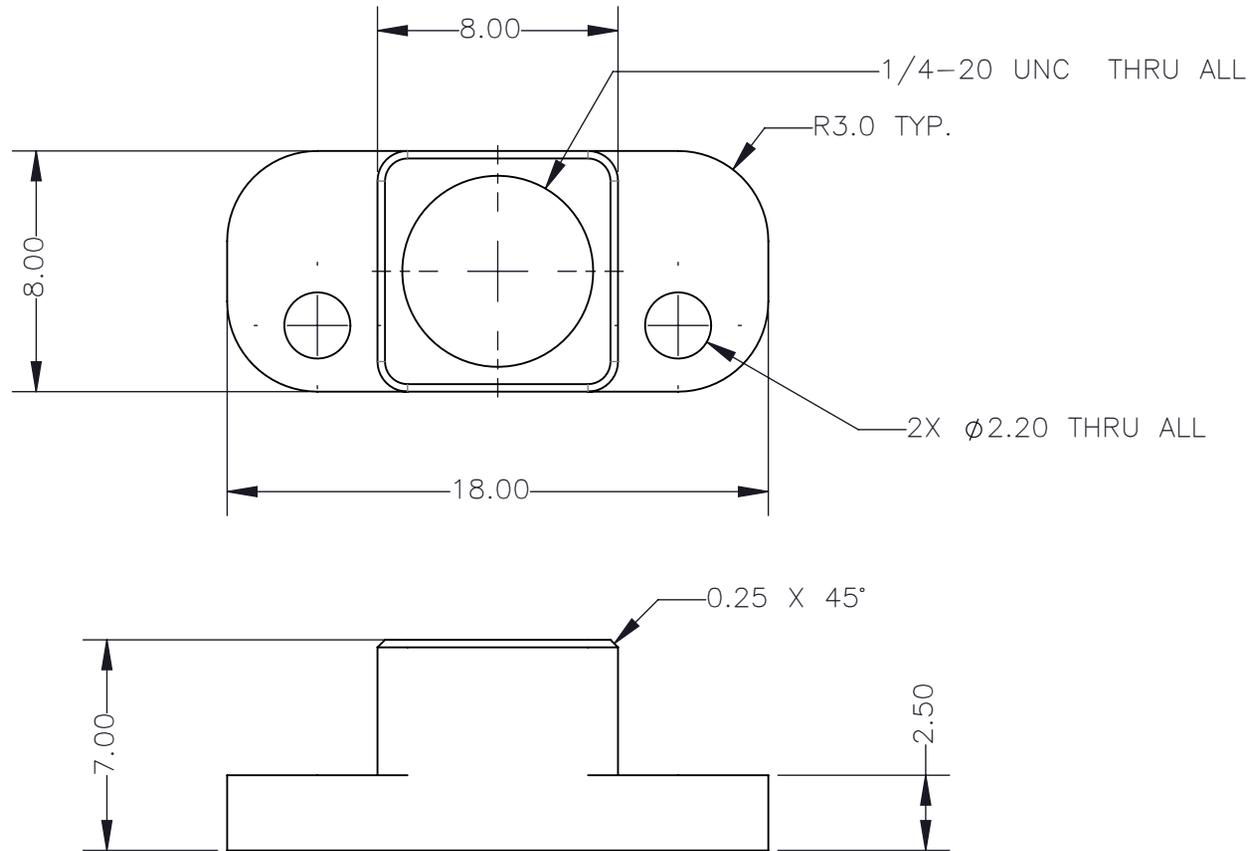

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS
 THE SOLE PROPERTY OF FLIR INTEGRATED IMAGING
 SOLUTIONS. ANY REPRODUCTION IN PART OR
 WHOLE WITHOUT THE WRITTEN PERMISSION OF FLIR
 INTEGRATED IMAGING SOLUTIONS IS PROHIBITED.



TOLERANCES
 X.X ±0.3
 X.XX ±0.10
 X.XXX ±0.020
 ANGLES ±0.5°

UNLESS OTHERWISE
 STATED:
 ALL DIMENSIONS IN MM
 MACHINE FINISH 1.6μM

SCALE DWG NO
 2:1 12-00112-00000
 SIZE TITLE
 A FFY TRIPOD ADAPTER

SHEET REV
 2 OF 2 0